



ATTENZIONE: La Sirca si riserva la facoltà di interrompere o modificare i particolari e la costruzione di un suo prodotto, senza alcun obbligo di informare prima i destinatari dei disegni precedenti. NOT E: SIRCA RESERVES THE RIGHT TO INTERRUPT PRODUCTION OR MODIFY COMPONENTS AND/OR CONSTRUCTION OF ITS PRODUCT, WITHOUT OBLIGATION TO INFORM BEFORE THE ADDRESSES OF PREVIOUS DRAWINGS.

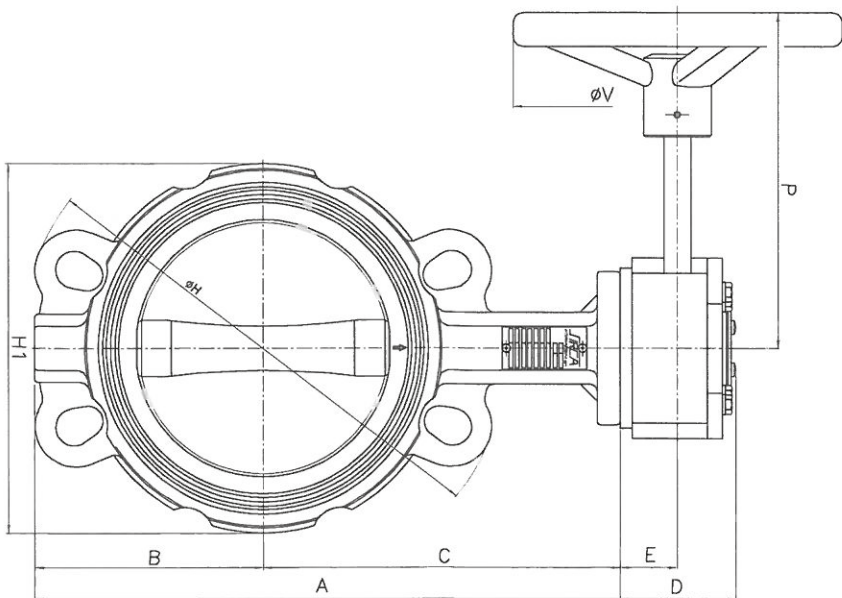

DN SIZES	MODEL GEAR RV	A	B	C	D	E	F	ØH	ØH1	J	K	L	N	O	P	ØR	ØV	S	PESO/ Weight
mm-in		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
40-1 1/2"	RV1 24x1	100	60,4	129,6	69	34	46,5	145	83,5	33	4,25	19,7	125	72,5	197	106	200	259	6,9
50-2"	RV1 24x1	207	72	135	69	34	46,5	162	99	43	4,75	21,2	125	72,5	197	106	200	276	7,9
65-2 1/2"	RV1 24x1	232	82	150	69	34	46,5	180,5	116	46	10,5	44,6	125	72,5	197	106	200	301	8,5
80-3"	RV1 24x1	252	92	160	69	34	46,5	198	135	46	18	65	125	72,5	197	106	200	321	8,7
100-4"	RV1 24x1	282	102	180	69	34	46,5	224	157	52	25	85	125	72,5	197	106	200	351	10,2
125-5"	RV1 24x1	315	120,5	194,5	69	34	46,5	260	197	56	35,5	112	125	72,5	197	106	200	384	12,2
150-6"	RV1 24x1	345	134,5	210,5	69	34	46,5	287	211	56	44,6	136	125	72,5	197	106	200	414	13,4
200-8"	RV1 30x1	410	172	238	84	37,5	67	348	270	60	71	193	178	101,5	231	153	200	494	22,2
250-10"	RV1 30x1	481	202	279	84	37,5	67	415	317	68	90	238,7	178	101,5	231	153	300	565	32,0
300-12"	RV1 30x1	553	239	314	84	37,5	67	483	373	78	111	289	178	101,5	231	153	300	637	40,5

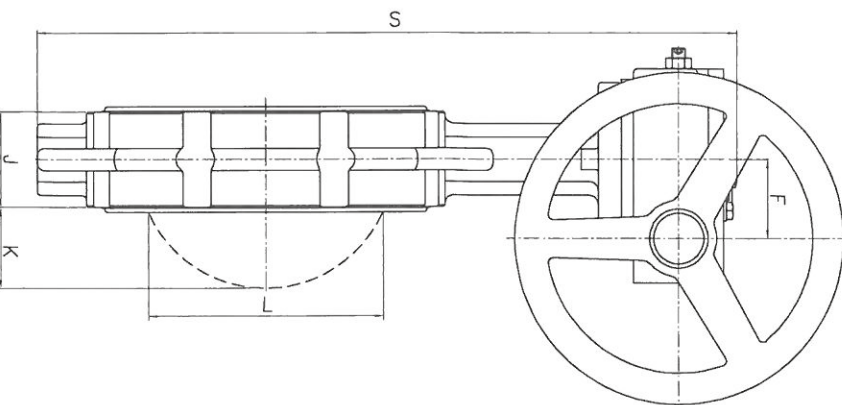

NOTA: In tabella sono presenti gli accoppiamenti standard SIRCA, su richiesta e dopo overline verificato lo fattibilità, è possibile eseguire accoppiamenti speciali e/o accoppiamenti diversi.
NOTE: In the table there are present all the standard SIRCA couplings, on request and only after checked the feasibility, it's possible executing special mountings and/or different couplings.

REFERING NORMS FOR BTV S301 E

Design construction

— ASME B76.34

— API 609

— LS, EN 558-1

Testing

— API 598

— API 6D

— UNI EN12226-1

— UNI EN1092-1

— ASME B16.5 for ANSI 150.

Top Mounting

— ISO 5211

Quality assurance

— UNI EN 150 9001-2000

TECHNICAL FEATURES FOR GEAR RV type

— Rotation: 90°±5°

— Max. Output torque: For 24-1 340 Nm

— Max. Output torque: For 30-1 750 Nm

— IP 65.

