

Valvola a sfera WAFER PN16 SERIE VSFD16W26

- Investment Castings for body and Cap
- Internal Entry Blow-Out Proof Stem
- Flanged End: 1/2"-2"(PN16/25/40):DIN2543/2544/2545 2-1/2"-4"(PN16):DIN2543
- Mounting Pad: ISO 5211
- Pressure Rating: 1/2"-2":PN16/25/40, 2-1/2"-4": PN16
- Working Temperature -25°C+180°C
- Material: CF8M,CF8,CF3M,WCB





VSFD16W26M
WITH MOUNTING PAD

- 精密铸造一片对夹式法兰球阀（带高平台）
- 法兰标准：1/2"-2"(PN16/25/40):DIN2543/2544/2545 2-1/2"-4"(PN16):DIN2543
- 驱动盘标准：ISO 5211
- 压力等级：1/2"-2":PN16/25/40, 2-1/2"-4": PN16
- 工作温度：-25°C+180°C
- 材质：CF8M,CF8,CF3M,WCB

MATERIAL LIST

ITEM	PART	MATERIAL			QTY
1	BODY	A216-WCB	A351-CF8	A351-CF8M	1
2	CAP	A216-WCB	A351-CF8	A351-CF8M	1
3	BODY GASKET	PTFE			1
4	BALL	304	304	316	1
5	SEAT	RPTFE			2
6	STEM	304	304	316	1
7	THRUST WASHER	PTFE			1
8	O RING	VITON			1
9	STEM PACKING	PTFE			1
10	GLAND NUT	304			1
11	BELLEVILLE WASHER	301			2
12	NUT STOPPER	304			1
13	NUT	304			2
14	PLATE WASHER	304			2
15	LOCK	304			1
16	HANDLE	304			1
17	HANDLE COVER	PLASTIC			1
18	STOP PIN	304			1

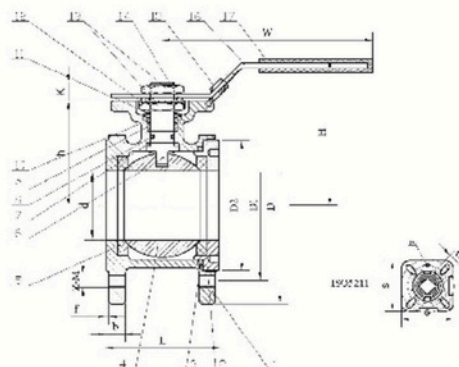

DIMENSION TABLE

SIZE		D	L	D	D1	D2	B	F	H	W	C	ISO5211	Z-M	N.M	KGS
DN15	1/2"	15	36	95	65	45	11	2	89	117	9	F03/F04	4-M12	5	1.21
DN20	3/4"	20	38	105	75	58	11	2	94	117	9	F03/F04	4-M12	8	1.53
DN25	1"	25	50	115	85	68	12	2	90	164	11	F04/F05	4-M12	10	1.95
DN32	1-1/4"	32	53	140	100	78	14	2	100	164	11	F04/F05	4-M16	14	3.10
DN40	1-1/2"	40	65	150	110	88	15	3	105	203	14	F05/F07	4-M16	18	4.18
DN50	2"	50	78	165	125	102	16	3	125	203	14	F05/F07	4-M16	25	5.37
DN65	2-1/2"	65	98	185	145	122	16	3	140	255	17	F07/F10	4-M16	48	10.10
DN80	3"	76	118	200	160	138	18	3	145	255	17	F07/F10	4-M16	75	12.30
DN100	4"	94	140	220	180	158	18	3	175	302	17	F07/F10	4-M16	110	19.40