
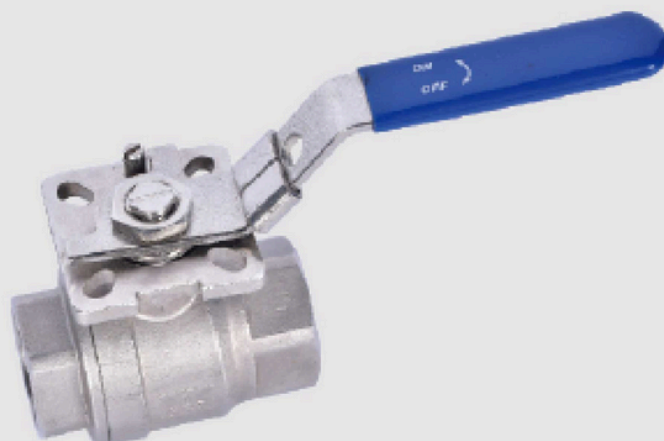


Valvola a sfera monoblocco flangia ISO SERIE VSFF126

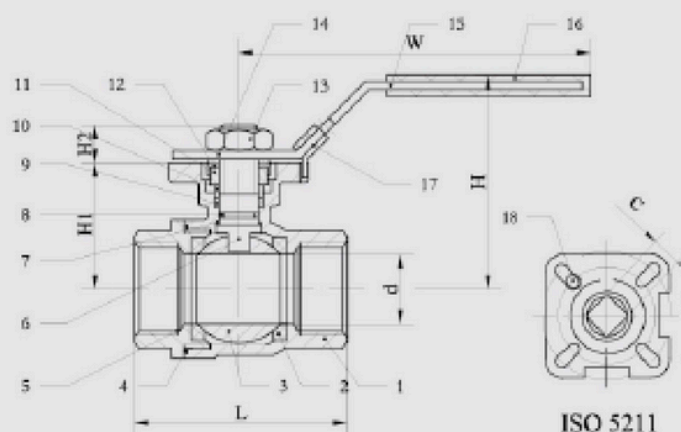

- Investment Castings for body and Cap
- Internal Entry Blow-Out Proof Stem
- Pressure Rating: 1000PSI (PN63)
- Thread End: ANSI B2.1, BS21, ISO7/1
- Mounting Pad: ISO 5211
- Working Temperature: -25°C +180°C
- Material: CF8M, CF8, CF3M, WCB

- 精密铸造两片式球阀 (通径, 带高平台)
- 压力等级: 1000PSI (PN63)
- 螺纹标准: ANSI B 2.1, BS21, ISO7/1
- 驱动平台标准: ISO 5211
- 工作温度: -25°C +180°C
- 材质: CF8M, CF8, CF3M, WCB

MATERIAL LIST

ITEM	PART	MATERIAL			QTY
1	BODY	A216-WCB	A351-CF8	A351-CF8M	1
2	SEAT	PTFE/RPTFE			2
3	BALL	304	304	316	1
4	GASKET	PTFE			1
5	CAP	A216-WCB	A351-CF8	A351-CF8M	1
6	STEM	304	304	316	1
7	THRUST WASHER	PTFE			1
8	O RING	VITON			1
9	PACKING	PTFE			1
10	GLAND NUT	304	304	304	1
11	BELLEVILLE WASHER	304	304	304	2
12	NUT STOPPER	304	304	304	1
13	NUT	304	304	304	2
14	PLATE WASHER	304	304	304	1
15	LOCK	304	304	304	1
16	HANDLE	304	304	304	1
17	HANDLE COVER	PLASTIC			1
18	STOP PIN	304	304	304	1

DIMENSION TABLE

SIZE	Φd	L	H	W	C	ISO5211	N.M	KGS
DN6 1/4"	11.5	56	65	115	9	F03	5	0.37
DN10 3/8"	12.5	56	65	115	9	F03	5	0.35
DN15 1/2"	15	57	65	145	9	F03/F04	5	0.37
DN20 3/4"	20	64	70	145	9	F03/F04	8	0.49
DN25 1"	25	77	75	160	11	F04/F05	10	0.74
DN32 1-1/4"	32	90	85	160	11	F04/F05	14	1.18
DN40 1-1/2"	38	105	95	185	14	F05/F07	18	1.94
DN50 2"	50	125	105	185	14	F05/F07	25	2.90
DN65 2-1/2"	65	153	140	255	17	F07/F10	48	5.77
DN80 3"	76	172	145	255	17	F07/F10	75	8.45
DN100 4"	76	221	175	302	17	F07/F10	110	15.6